



fiorentini

WWW.FIORENTINISPA.COM

JOLLY



We clean the world.

Noi puliamo il mondo.

JOLLY




SPECIFICHE PRINCIPALI TECHNICAL SPECIFICATIONS PRINCIPALES CARACTERISTIQUES TECHNIQUES	JOLLY 13	JOLLY 17	JOLLY 17/2	JOLLY 20
Larghezza utile di lavoro con spazzola laterale Sweeping width / Largeur de nettoyage	mm 330	mm 430	mm 430	mm 500
Rendimento orario max. Cleaning capacity up to / Rendement jusqu'à	m ² /h 250	m ² /h 300	m ² /h 300	m ² /h 400
Capacità serbatoio soluzione Solution tank capacity / Capacité réservoir solution	L 12/18	L 12/18	L 12/18	L 12/18
Pressione testata spazzole Brush pressure / Pression des brosses	Kg 35	Kg 40	Kg 40	Kg 45
Velocità rotazione spazzole Brush speed rotation / Vitesse rotation brosse	rpm 150	rpm 150	rpm 175/325	rpm 150
Rumorosità Noise level / Bruit	dB 65	dB 65	dB 72	dB 65
SPECIFICHE ALIMENTAZIONE POWER SPECIFICATIONS DONNEES DE L'ALIMENTATION	JOLLY 13	JOLLY 17	JOLLY 17/2	JOLLY 20
Alimentazione Voltage / Alimentation	v 230/115 50/60 Hz	v 230/115 50/60 Hz	v 230/115 50/60 Hz	v 230/115 50/60 Hz
Motore spazzola Brush motor / Moteur de la brosse	1x 1100w	1x 1100w	1x 1100w	1x 1100w
DIMENSIONI E PESI DIMENSIONS & WEIGHT DIMENSIONS ET POIDS	JOLLY 13	JOLLY 17	JOLLY 17/2	JOLLY 20
Misure: L x l x h Measures: L x w x h / Mesures: L x l x h	mm 560x350x1170	mm 600x450x1170	mm 600x450x1170	mm 600x500x1170
Lunghezza cavo elettrico Electric cable length / Longueur du cable	m15	m15	m15	m15
Numero diametro spazzola Number of brushes and diameter Nombre et diamètre des brosses	1 x Ø 330 mm	1 x Ø 430 mm	1 x Ø 430 mm	1 x Ø 500 mm
Peso macchina Weight of the machine / Poids de la machine	Kg 35	Kg 40	Kg 40	Kg 45
OPTIONAL	JOLLY 13	JOLLY 17	JOLLY 17/2	JOLLY 20
Generatore di schiuma Foam generator / Générateur de mousse	230 v/115 1 x 750 w	230 v/115 1 x 750 w	230 v/115 1 x 750 w	230 v/115 1 x 750 w



SUPERIOR PLANETARY GEAR UNIT.

The Floor Maintainer houses a precision planetary gear unit oversized, double-race ball bearings plus hardened alloy steel and Meehanite gears. Special close tolerance helicalcut gear teeth provide optimum contact for maximum power transmission. Special Neoprene and steel coupling makes it impossible to break a gearunit, even under abusive, high-torque operation.

SERIE SPAZZOLE E TRASCINATORI - BRUSH TYPES AND DRIVING PADS BROSSES ET DISQUES ENTRAINEURS

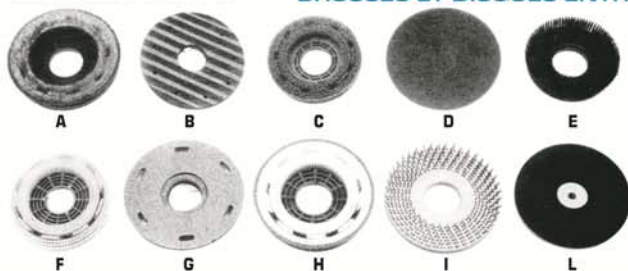

- A** LUCIDARE
POLISHING
CIRAGE
- B** TRASCINATORE
DRIVING-PAD
DISQUE ENTRAINEUR
- C** TYNEX
- D** DISCO
PAD
DISQUE
- E** MISTO ACCIAIO
NYLON/STEEL
NYLON/ACIER
- F** LAVARE
SCRUBBING
LAVAGE
- G** TRASCINATORE 3M
DRIVING-PAD 3M
DISQUE ENTRAINEUR 3M
- H** MOQUETTE
CARPET BRUSH
BROSSE MOQUETTE
- I** SPUNTONI
PIN BRUSH
BROSSE A POINTES
- L** SUPPORTO CARTA SMERIGLIO
DRIVING SCOTCH MESH
ENTRAINEUR CARTE EMERI



fiorentini
WWW.FIORENTINISPA.COM

We clean the world.
Noi puliamo il mondo.

www.fiorentinispa.com - sales@ingfiorentini.it

SEDE AMM. E STABILIMENTI

50030 PIANCALDOLI (FI) - Loc. ROMBOLA - via Piancaldoli, 1896 - Tel. +39 055.8173610 - Fax +39 055.817144
50033 PIETRAMALA(FI) - via Pietramala Lama, 70/b - Tel. +39 055.813447 - Fax +39 055.813504
40024 CASTEL SAN PIETRO TERME (BO) - via Cà Bianca, 231/C - Tel. +39 051.941743 - Fax +39 051.6942400

FILIALI

20132 MILANO - Via Palmanova, 211/A - Tel. +39 02.27207783 - 2564810 - Fax +39 02.2592779
00012 GUIDONIA MONTECELIO (ROMA) - Via Bruno Pontecorvo, 20 - Tel. +39 0774.357184 - Fax +39 0774.353419